


# SCARED STIFF

## Repair Kit Installation Instructions

### For Left Ramp Assembly A-20753

This kit contains:

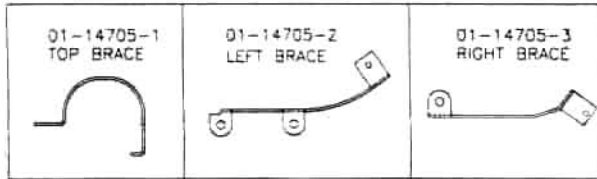

01-14475	Trap Door Flap
07-6704-03	1/8" x 3/16" Pop Rivets

1. Turn off and unplug the game.
2. Open the coin door. Slide the lever guide to the left and remove the front molding. Carefully, slide the playfield glass down and remove it from the game cabinet.
3. Snap the bones off of the ramp.
4. Remove the three screws that hold the ramp to the support posts. Place the left and right braces between the post and the back side of the ramp, as shown in the drawing below. Place the top brace on over the ramp. Hook the right side of the top brace under the right brace. Replace the screws
5. Drill two 0.128 holes in the ramp that line up with the holes in the right and left brace tabs. Insert pop rivets through the ramp and into each brace.
6. Use a 0.128 bit and drill out the two rivets that hold the ramp flap. Replace the flap with the new one included in this kit. Secure the flap into place with two pop rivets.
7. Snap the bones back onto the ramp.
8. Replace the playfield glass and front molding. Close and lock the coin door. Plug in and switch on the game.

